



230V AC operators

without control board and rod cover

| COD. | Art. | | | | OTHER CHARACTERISTICS |
|--------|-----------------|---|-------|---|--|
| 627000 | 351/SC | ● | 320mm | | For leafs up to 3m length |
| 627012 | 351EN/SC | ● | 320mm | ● | With encoder, for leafs up to 3m length |
| 627021 | 352/SC | ● | 320mm | | With limit switches, for leafs up to 3m length |
| 627053 | 355/SC | ● | 520mm | | For leafs up to 4,5m length |
| 627052 | 355EN/SC | ● | 520mm | ● | With encoder, for leafs up to 4,5m length |
| 627061 | 356/SC | ● | 520mm | | With limit switches, for leafs up to 4,5m length |

All models have: adjustable fixing plates to be screwed included (art. LOOK/SFR), rod cover not included

Control board to complete the installation: control board cod. 677610 art. NET230N/C (with box)

Limit switches set up: articles 352 and 356 are supplied with built-in limit switches in open and closed position, to be connected to the control board.

24V DC operators

without control board and rod cover

| COD. | Art. | | | | OTHER CHARACTERISTICS |
|--------|----------------|-----|-------|--|-----------------------------|
| 627092 | 371E/SC | ● | 320mm | | For leafs up to 1,8m length |
| 627090 | 371/SC | ● ● | 320mm | | For leafs up to 3m length |
| 627123 | 373/SC | ● ● | 520mm | | For leafs up to 4,5m length |

All models have: adjustable fixing plates to be screwed included (art. LOOK/SFR), rod cover not included

Control board to complete the installation: control board cod. 678261 art. NET24N/C (with box)

Rod cover




| COD. | Art. | | OTHER CHARACTERISTICS |
|--------|--------------|-------|------------------------|
| 629340 | CS320 | 320mm | Rod cover stroke 320mm |
| 629341 | CS520 | 520mm | Rod cover stroke 520mm |


| TECHNICAL INFO | 351 352 351EN | 355 356 355EN | 371E | 371 | 373 |
|-------------------------------|---------------------------|---------------------------|----------|----------|----------|
| Motor power supply (V) | 230V AC ± 10 % (50/60 Hz) | 230V AC ± 10 % (50/60 Hz) | 24V DC | 24V DC | 24V DC |
| Maximum power absorption (W) | 300 | 300 | 50 | 60 | 60 |
| Max thrust (N) | 1650 | 1650 | 500 | 1000 | 1000 |
| Duty cycle (cycles/hours) | 22 - 25 (vers. 351EN) | 22 - 25 (vers. 355EN) | 10 | 40 | 40 |
| N. max cycles in 24h. | 110 | 110 | 50 | 110 | 110 |
| Built-in capacitor (µF) | 8 | 8 | / | / | / |
| Operating temperature (°C) | -20 ÷ 50 | -20 ÷ 50 | -20 ÷ 50 | -20 ÷ 50 | -20 ÷ 50 |
| Motor thermal protection (°C) | 150 | 150 | / | / | / |
| 90° Opening time (s) | 16 | 17 | 15 | 14 | 15 |
| Weight with packing (Kg) | 9 | 9,5 | 9 | 9 | 9 |
| Protection level | IP24 | IP24 | IP24 | IP24 | IP24 |




EXAMPLE OF A TYPICAL INSTALLATION

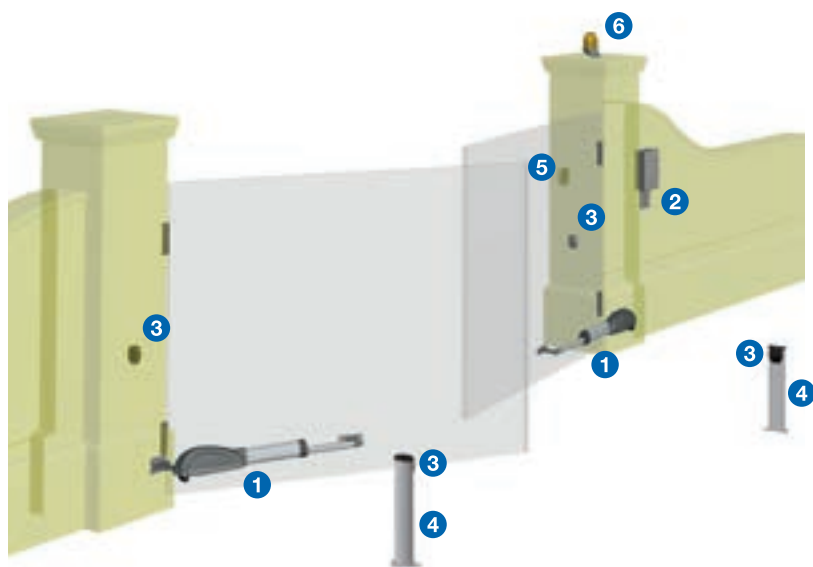


DIMENSIONS

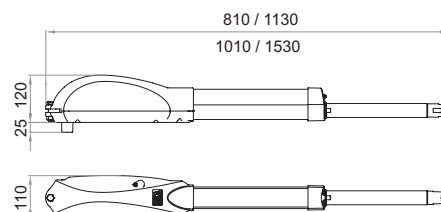

FIXING PLATES

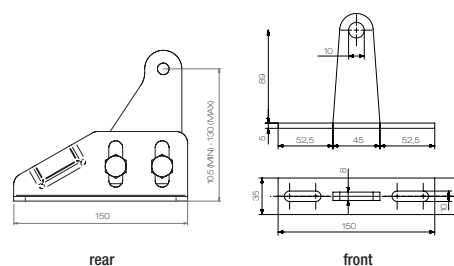

1  Cod. 627012
Art. 351EN/SC
Electromechanical automations for swing gates

2  Cod. 677610
Art. NET230N/C
Universal digital control board for 1 or 2 operators, 230V with or without magnetic encoder (with box)

3  Cod. 662030
Art. 104LUX
Pair of adjustable (15°) surface mounted photocells

4  Cod. 664000
Art. PILLY/60
Pair of aluminium columns for photocells, height 55 cm

5  Cod. 663030
Art. 102LUX
Keyswitch with two contacts, surface mounted. Supplied with 2 keys.

6  Cod. 661062
Art. LED230AI
Led flashing light 230V with built-in antenna 433MHz

 Cod. 672580
Art. TR2
2 channels remote control
Black version art. TR2N also available (page 132)

 Cod. 668010
Art. 127
Warning sign

DEA[®] DE@AUTOGATE INDONESIA
0878 8399 0876
0896 9998 3721
www.deaautogate.id
move as you like